

7B/2004/04118



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Le Behen*

Dated

13 December 2004

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference  
303593GB/PRS/SJB
2. Patent application number  
(The Patent Office will fill in this part)  
0330054.8 ✓ 24 DEC 2003 ✓
3. Full name, address and postcode of the or of each applicant (underline all surnames)  
NOKIA CORPORATION  
KEILALAHDENTIE 4  
FIN 02150 ESPOO  
FINLAND  
Patents ADP number (if you know it)  
If the applicant is a corporate body, give the country/state of its incorporation  
FINLAND  
7652217001
4. Title of the invention  
MOBILE STATION HAVING A CONFIGURABLE GRIP
5. Name of your agent (if you have one)  
PAGE WHITE & FARRER  
54 Doughty Street,  
London WC1N 2LS,  
United Kingdom  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
Patents ADP number (if you know it)  
1255003 ✓
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number  
Country Priority application number (if you know it) Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application  
Number of earlier application Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))  
YES

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	10
Claim(s)	3
Abstract	1
Drawing(s)	3 + 3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*Philip Roy Slingsby*

Date 24/12/03

12. Name and daytime telephone number of person to contact in the United Kingdom

PHILIP ROY SLINGSBY  
(020) 7831-7929

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## MOBILE STATION HAVING A CONFIGURABLE GRIP

As the functionality of mobile stations increases, one emerging use of a mobile telephone is as a video capture device for recording moving images, another is the use of the product as a mobile gaming device. However, existing mobile stations have a strong voice bias and as such are currently designed to fit comfortably within the user's hand while the user makes and receives calls. Even the first generation of mobile stations with integrated digital cameras have the 'conventional' grip of a mobile station. This conventional grip is not suitable for capturing images, as it generally requires the mobile station to be gripped between the thumb and fingers of the user during filming. This is an unstable gripping position, which contributes to video shake i.e. unwanted movement in captured video sequences. This grip is also uncomfortable for extended periods of time and, as it is relatively unstable, could lead to the user dropping, and damaging, the mobile station. Therefore, there is a need for a mobile communication station that can provide a comfortable, stable grip for filming.

According to the present invention, there is provided a mobile communication station including a camera and having a grip for being gripped by a user

during use of the communication station, the grip having a first compact configuration and a second configuration in which the grip is expanded relative to the first configuration to improve the grip of the user on the communication station when the grip is in the second expanded configuration.

Preferably, the mobile communication station has a body portion to which the grip is attached and with respect to which the grip is movable.

The body portion may house operational components of the communication station.

The body portion of the mobile communication station may include the camera.

User input and/or output components of the communication station may be exposed on the surface of the body portion.

Preferably, the grip of the mobile communication station is rotatable relative to the body portion.

In one embodiment of the present invention, the grip is rotatable relative to the body portion about an axis substantially parallel to the direction in which the camera points, so as to project from the body portion.

In another embodiment of the present invention, the grip is rotatable relative to the body portion about an axis substantially perpendicular to the direction in which the camera points, so as to project from the body portion.

The mobile communication station may be arranged such that in at least one rotational position the grip extends continuously from the body in the direction of the axis of rotation.

The grip may be slidable relative to the body portion.

Preferably, the grip has a core portion and at least one outer wall movable away from the core portion, and wherein in moving from the first compact configuration to the second expanded configuration the or each wall is moved away from the core portion.

Preferably, the mobile communication station is capable of operating as a mobile telephone.

In an embodiment of the present invention, the mobile communication station is capable of sensing relative motion of at least a part of the grip portion and another part of the mobile communication station, and in response switching from a first operating mode to a second operating mode.

User input and/or output components of the communication station may be exposed on the surface of the grip.

Preferably, the grip portion is movable relative to the direction in which the camera points so as to be capable of adopting a position in which the user input and/or output components of the communication station are exposed on the surface of the grip face in substantially the opposite direction to that in which the camera points.

In an embodiment of the present invention, changing the configuration of the grip from the first compact configuration to the second expanded configuration can make available an additional user interface for controlling the operation of the mobile communication station.

The grip may house operational components of the mobile communication station.

The grip may be electrically connected to the main body of the mobile communication station.

According to an aspect of the present invention there is provided a mobile communication station having a body that is relatively elongate about an axis, the body comprising two portions which are mechanically coupled to each other by a linkage that permits rotation of one of the portions relative to the other about an axis parallel or substantially parallel to the said axis and prevents rotation of each portion relative to the other about other axes. Preferably one of the portions includes a camera. Preferably the other of the portions includes a display. In this way, preferably the portions can be

manipulated so that the display and the camera can both face a user. The display and the camera preferably both point or face in a direction perpendicular or substantially perpendicular to the axis of rotation.

For a better understanding of the present invention, reference is made to the following drawings in which:

Figure 1 shows a mobile station having a side hinged grip that can be extended in thickness.

Figure 2 shows a mobile station having a bottom hinged grip that can be extended in thickness.

Figure 3 shows a mobile station having a bottom hinged grip that can be extended in length.

A mobile station as shown in the figures achieves an improved grip for the user of the mobile station through being provided with a grip feature. The grip feature is connected to the main body of the mobile station by means of a connection, the connection being such that the grip feature is moveable with respect to the main body of the mobile station. The connection could typically be a pivot, a hinge, or a sliding arrangement etc. The grip feature may contain functional components, especially functional electronic components, of the mobile station.

The mobile station also contains a user interface, which would typically comprise at least a display (or other output device) and a keypad (or other input device). The user is able to make and receive calls, send text messages and play games etc by means of the user interface.

In addition, the mobile station according to the present invention would have a video capture device such as a camera, having a viewfinder, a lens, a memory, zoom, associated circuitry etc.



The grip feature enables the mobile station to assume two spatial forms. In its first form the mobile station has a relatively compact arrangement, similar to the conventional arrangement of a mobile station. In this form the mobile station is designed to fit comfortably within the user's hand during calls. The ergonomics of the mobile station in this form are well suited for making and receiving calls. This form further has a compact representation, making it light and easy to carry within a user's pocket, handbag etc.

The second spatial form of the mobile station is arranged so as to provide an improved ergonomic design well suited for video capture. During video capture it is preferred that the user is provided with a stable grip for holding the mobile station, to avoid movement in the resulting video images. The grip should also allow the user to hold the mobile station in a suitable orientation for capturing images. This may, for example, involve the user to looking through a viewfinder during video capture.

In embodiments of the present invention, the improved grip for video capture is achieved through mechanical movement and enlargement of the grip feature. The grip feature is preferably arranged such that it can be manipulated by the user, although it could move under automatic control of the mobile station on detecting a change in operating mode between a communication mode and a camera mode. This manipulation would typically be achieved through two stages: the first stage involving moving the grip feature in relation to the main body of the mobile station in order to achieve an optimal spatial arrangement of the grip and the second stage involving some form of expansion or extension of the grip feature in order to improve the stability and comfort of the user's grip on the mobile station. The mobile station could sense movement of the grip feature and in response switch from one operating mode to another: for instance it could enter a camera mode when the grip portion is moved to a position adapted for stable holding and a phone mode when it is moved to a compact position.

During the first stage of manipulation, the user moves the grip feature about the connection between the grip feature and the main body of the mobile station. This would typically involve some form of mechanical movement or translation, for example, twist/pivot, slide, pop-up or fold.

During the second stage of manipulation, the grip feature forms a 'power grip' by enlarging. In this form the grip feature can be enclosed within the user's hand during filming rather than being held between the thumb and other fingers. The enlargement can be achieved, for example, by the outer surfaces of the grip feature extending by mechanical means. Alternatively, the length of the grip feature could be mechanically extended. Both of these examples are illustrated in figures 1 to 3, which are described below. The present invention is not limited to these examples, but encompasses any method by which the grip feature can be expanded so as to provide an improved grip for the user.

The grip feature of the present invention not only renders the hold that the user has on the mobile station more stable, so that unwanted movement in the video image becomes less noticeable, but also provides a more comfortable grip. This is of particular relevance when a user wishes to record video images for an extended period of time. Also, as the grip is more stable, the user is less likely to drop the mobile station and therefore damage it.

Figures 1 to 3 illustrate examples of mobile stations having configurable grip features according to embodiments of this invention.

Figure 1 illustrates a mobile station having a side hinged grip, which can be extended in thickness.

Figure 1a shows the mobile station in the first compact arrangement. The mobile station (1) has a main body (2) having a video capture device (3) and a grip feature (4). The user changes the configuration of the mobile station by rotating the grip feature through a predetermined angle (probably 180°, as shown in steps 1 and 2 of the figure). This results in the arrangement shown in Figure 1b, with the grip feature protruding from the main body of the mobile station. The outer surfaces of the grip feature are extended outwards.

mechanically in step 3, which is also shown in Figure 1b. This is further illustrated in Figure 1c. The grip feature of figure 1 provides better stability because it can be clenched by a user with his fingers wrapped around it. The radial expansion of the grip feature can allow this to be done more comfortably, especially when the width of the grip feature in its unexpanded configuration is small.

Figure 2 shows a further embodiment of the present invention, in which the mobile station has a bottom hinged grip and can be extended in thickness.

Figure 2a illustrates the mobile station (1) in its compact representation. In this implementation the user interface and/or keypad is contained within the grip feature (4), which forms the bottom portion of the mobile station. Figures 2b and 2c show the bottom portion of the mobile station i.e. the grip being rotated through a predetermined angle (probably  $90^\circ$ ) in steps 1 and 2, so that the grip can be held within the hand rather than between the thumb and the fingers. As before, the outer surfaces of the grip are extendible so as to improve the ergonomic arrangement of the mobile station. The extended arrangement is illustrated in Figures 2c and 2d.

Figure 3 shows a further embodiment of the present invention, in which the mobile station has a bottom hinged grip and can be extended in length.

Figure 3a shows the mobile station in its compact representation, as before. Figure 3b illustrates the grip portion (4) of the mobile station (1) being rotated through a predetermined angle (probably  $90^\circ$ ) and Figure 3c illustrates the grip being optimised for being held by the user by extending the length of the grip.

In each embodiment the grip feature 4 could include functional components of the mobile station. User interface components of the mobile station, such as a display and/or keys could be exposed on the outer surface of the grip feature. Such user interface components be turned with the grip feature so

that they face the user during camera operation, enhancing usability of the camera.

Features of the embodiments could be combined together. The grip feature of figure 2 could be telescopic as is the grip feature of figure 3. The hinge point of the grip feature of figures 2 and 3 could be in any suitable location. The grip feature of figure 3 could be laterally as well as vertically expandable.

Changing the configuration of the mobile station by rotating and/or extending the grip feature may expose a surface of the mobile station that was previously covered or inaccessible (e.g. surfaces 10, 11 in figure 3c). As the configuration of the mobile station is changed in order to provide an optimal configuration for operating the mobile station in a particular mode, this surface could be used to provide additional user controls for that mode. For example, the controls could allow the user to control the operation of the mobile station in the video capture mode. The controls could provide control functions such as record, mode select or rewind/fast forward.

Although the mobile station according to the present invention is arranged to have an expanded configuration, it is important that the mobile station is still able to adopt the conventionally small size of mobile stations in its compact configuration. Therefore, according to an advantageous embodiment of the present invention, the volume within the grip feature is used to hold components such as batteries or circuitry. In such an embodiment it is necessary for electrical connections to be provided between the grip feature and the body of the mobile station. Hinge technologies that incorporate wires or printed circuit boards to provide an electrical connection are already used within existing consumer electrical products such as cameras or camcorders.

Future mobile stations will be capable of video streaming i.e. transmitting 'live' video images during a call. It is therefore important that a mobile station having a configurable grip according to the present invention is capable of multi-tasking, with the video capture functions and call functions being implemented simultaneously. Therefore, according to a further embodiment of

the invention, the mobile station is arranged such the user is able to operate the keypad, irrespective of the spatial configuration of the grip. This allows the user to operate the keypad whilst the mobile station is in video capture mode, enabling the user to make/receive calls, compose text messages and play games etc by operating the keypad while filming.

According to a preferred embodiment, the keypad of the mobile station does not require any additional keys for operating the mobile station as a video capture device.

By selecting a suitable material from which to manufacture the grip, the stability and comfort of the grip feature may be further enhanced.

The mobile station is suitably capable of communication with other devices, preferably wireless communication and most preferably radio communication. The mobile station is preferably capable of use as a mobile telephone, preferably for concurrent real-time transmission of a user's voice and real-time reception and replay of received voice data. The mobile station preferably has a microphone for detecting audio signals and a loudspeaker for replaying audio signals. The microphone and loudspeaker are preferably located on the mobile station such that they can be conveniently held to a user's ear and mouth for communication purposes in at least one configuration of the mobile station.

The present invention is not limited to enhancing video/camera functionality of a mobile device; it could also be used to enhance gaming or editing functions or any application where a grip feature could be expanded to improve the user grip.

The applicant hereby discloses in isolation each individual feature described herein and any combination of two or more such features, to the extent that such features or combinations are capable of being carried out based on the present specification as a whole in light of the common general knowledge of a person skilled in the art, irrespective of whether such features or

combinations of features solve any problems disclosed herein, and without limitation to the scope of the claims. The applicant indicates that aspects of the present invention may consist of any such feature or combination of features. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

**CLAIMS**

1. A mobile communication station including a camera and having a grip for being gripped by a user during use of the communication station, the grip having a first compact configuration and a second configuration in which the grip is expanded relative to the first configuration to improve the grip of the user on the communication station when the grip is in the second expanded configuration.
2. A mobile communication station as claimed in claim 1, wherein the communication station has a body portion to which the grip is attached and with respect to which the grip is movable.
3. A mobile communication station as claimed in claim 2, wherein the body portion houses operational components of the communication station.
4. A mobile communication station as claimed in claim 3, wherein the body portion includes the camera.
5. A mobile communication station as claimed in claim 3 or 4, wherein user input and/or output components of the communication station are exposed on the surface of the body portion.
6. A mobile communication station as claimed in any of claims 2 to 5, wherein the grip is rotatable relative to the body portion.
7. A mobile communication station as claimed in claim 6 as dependent directly or indirectly on claim 4, wherein the grip is rotatable relative to the body portion about an axis substantially parallel to the direction in which the camera points, so as to project from the body portion.
8. A mobile communication station as claimed in claim 6 as dependent directly or indirectly on claim 4, wherein the grip is rotatable relative to the body portion about an axis substantially perpendicular to the

direction in which the camera points, so as to project from the body portion.

9. A mobile communication station as claimed in claim 8, wherein in at least one rotational position the grip extends continuously from the body in the direction of the axis of rotation.
10. A mobile communication station as claimed in any of claims 2 to 5, wherein the grip is slidable relative to the body portion.
11. A mobile communication station as claimed in any preceding claim, wherein the grip has a core portion and at least one outer wall movable away from the core portion, and wherein in moving from the first compact configuration to the second expanded configuration the or each wall is moved away from the core portion.
12. A mobile communication station as claimed in any preceding claim, wherein in the mobile communication station is capable of operating as a mobile telephone.
13. A mobile communication station as claimed in claim 12, the mobile communication station is capable of sensing relative motion of at least a part of the grip portion and another part of the mobile communication station, and in response switching from a first operating mode to a second operating mode.
14. A mobile communication station as claimed in any preceding claim, wherein user input and/or output components of the communication station are exposed on the surface of the grip.
15. A mobile communication station as claimed in claim 14, wherein the grip portion is movable relative to the direction in which the camera points so as to be capable of adopting a position in which the user input and/or output components of the communication station are exposed on the surface of the grip face in substantially the opposite direction to that in which the camera points.



16. A mobile communication station as claimed in any preceding claim, wherein changing the configuration of the grip from the first compact configuration to the second expanded configuration makes available an additional user interface for controlling the operation of the mobile communication station.
17. A mobile communication station as claimed in any preceding claim, wherein the grip houses operational components of the mobile communication station.
18. A mobile communication station as claimed in claim 17, wherein the grip is electrically connected to the main body of the mobile communication station.
19. A mobile communication station having a body that is relatively elongate about an axis, the body comprising two portions which are mechanically coupled to each other by a linkage that permits rotation of one of the portions relative to the other about an axis substantially parallel to the said axis and prevents rotation of each portion relative to the other about other axes.
20. A mobile communication station as claimed in claim 19, wherein one of the portions includes a camera.
21. A mobile communication station as claimed in claim 20, wherein the other of the portions includes a display.
22. A mobile communication station as claimed in any preceding claim, including gaming or editing functions.
23. A mobile communication station substantially as herein described with reference to the accompanying drawings.

**ABSTRACT****Mobile station having a configurable grip**

A mobile communication station including a camera and having a grip for being gripped by a user during use of the communication station, the grip having a first compact configuration and a second configuration in which the grip is expanded relative to the first configuration to improve the grip of the user on the communication station when the grip is in the second expanded configuration.

Figure 1b

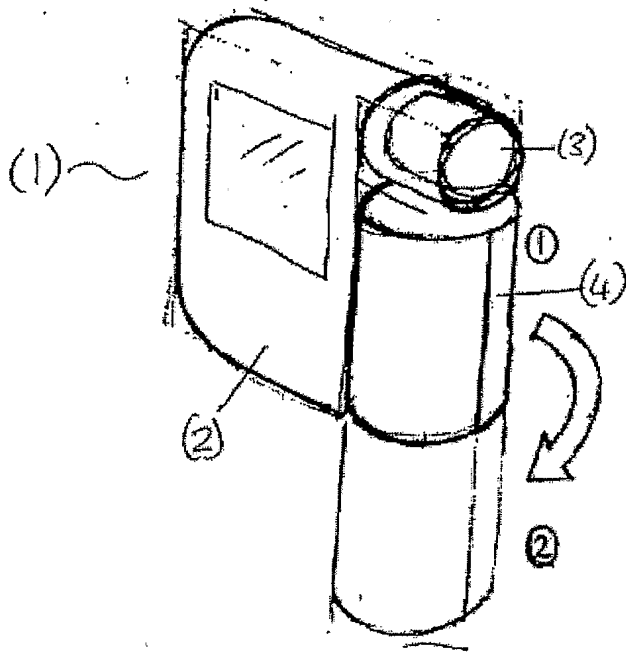


Figure 1a

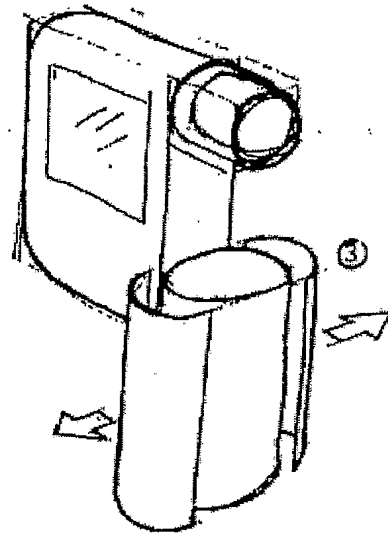


Figure 1b




Figure 1c



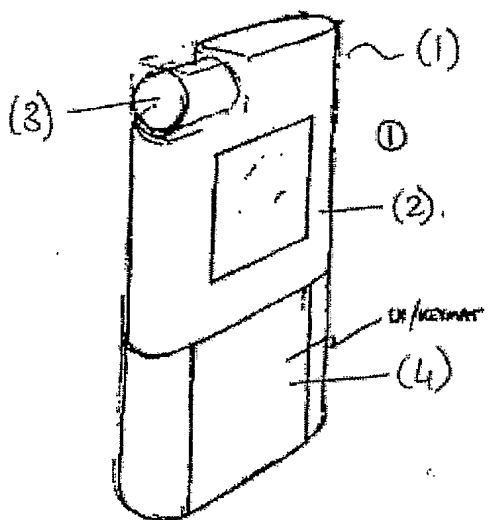


Figure 2a

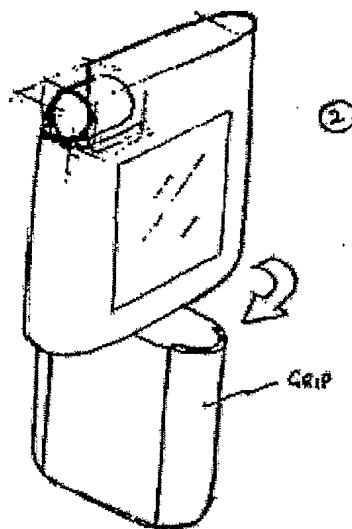


Figure 2b

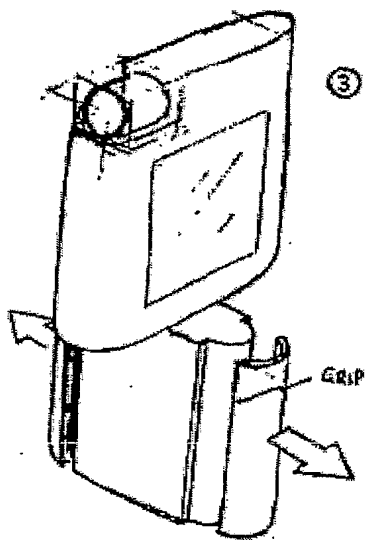


Figure 2c




Figure 2d



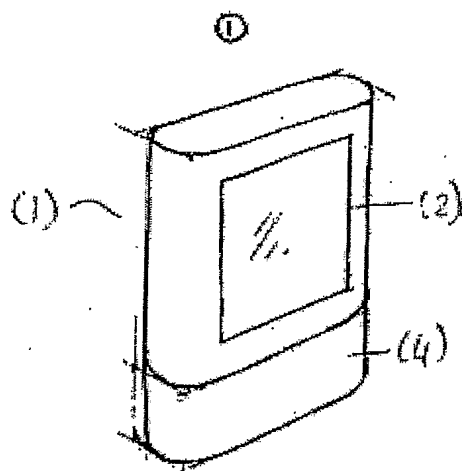


Figure 3a

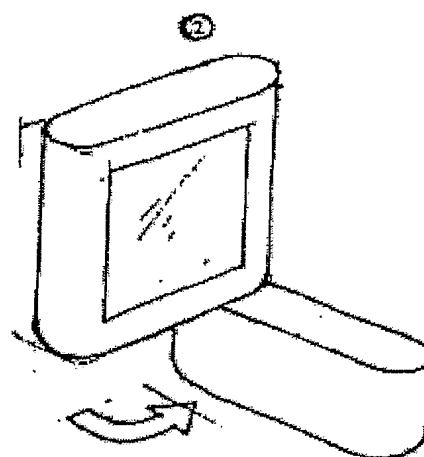


Figure 3b

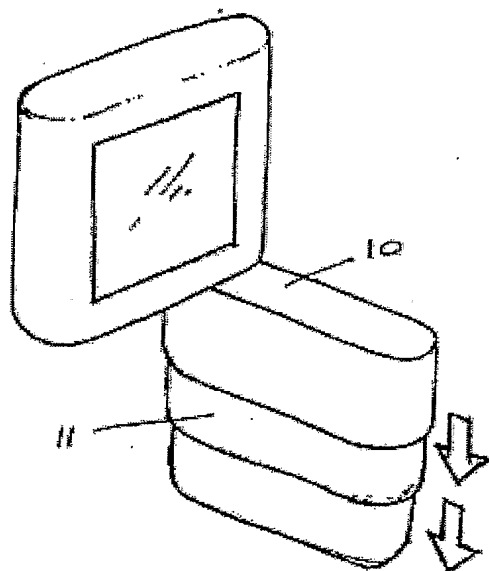


Figure 3c

PCT/IB2004/004118

